

Organic Photovoltaic Panels

Product Data-sheet



Apollo Series

PAGE 1/3





Flexible

Suitable for curved surfaces



Lightweight

Weighting less than 0.5 kg/m



Semi - Transparent

Up to 30% optical transparency



Cost - Effective

Short energy payback time



Environmentally Friendly

Non-toxic materials, recyclable



Performance

Indoor and outdoor efficiency



Large Area Coverage

Building and field applications



Custom Design

On Demand




Multicolor Palette

Variety of colors



Installation

Easy mounting and maintenance

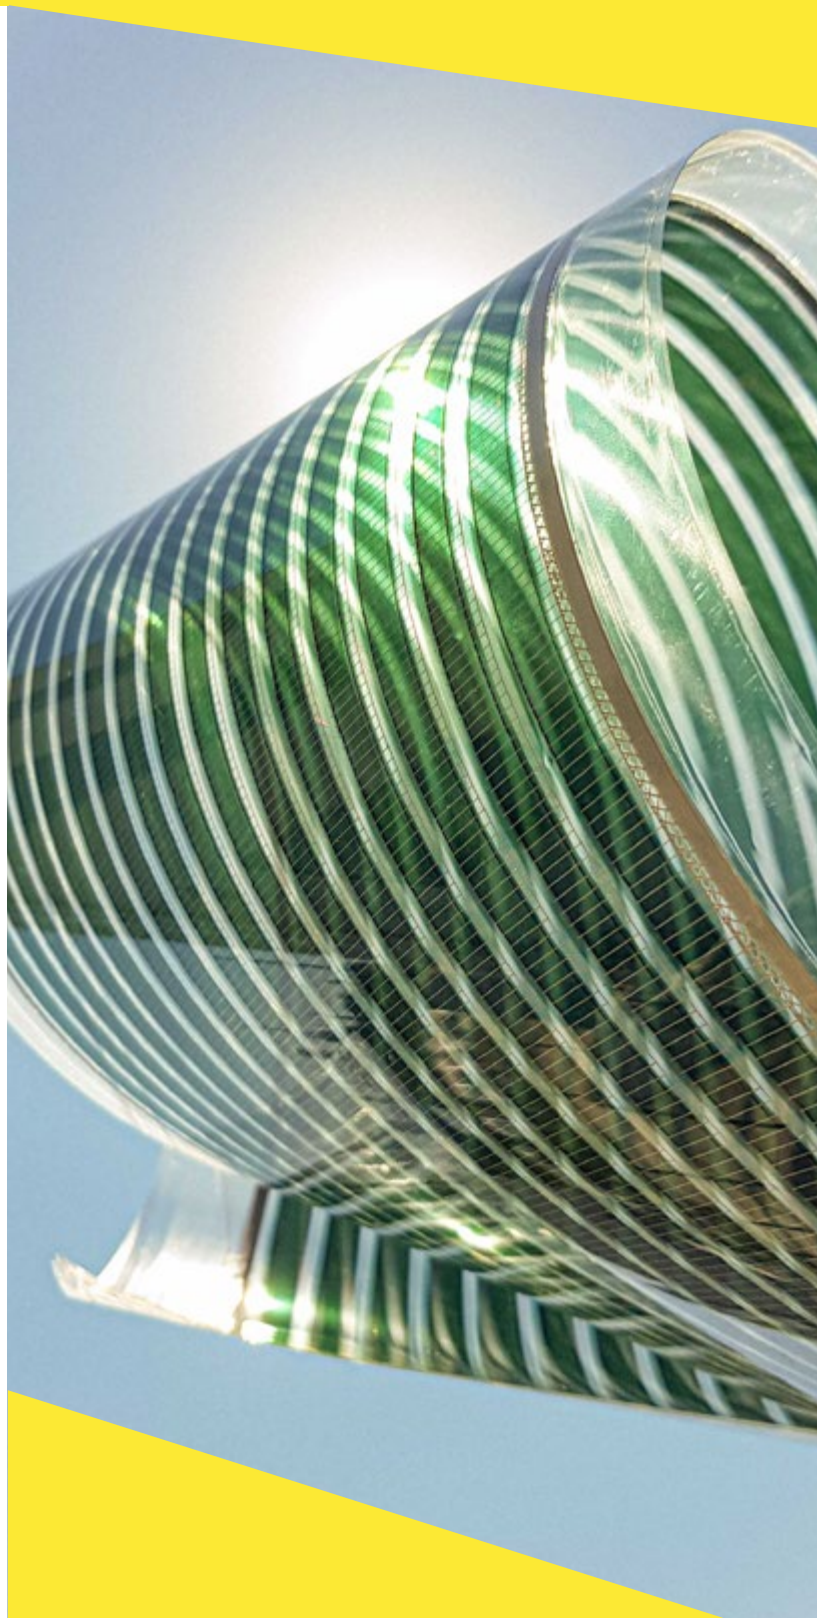




Product Series Apollo

Width (mm)	280
Length (mm)	930
Thickness (mm)	0.4 or greater
Weight (kg/m ²)	0.5

Panel Performance *

Nominal Max. Power (Pmax)	5,6 W
Operating Voltage (Vmp)	8 V
Operating Current (Imp)	0,7 A
Open Circuit Voltage (Voc)	12 V
Open Circuit Current (Isc)	1 A
Operating Temperature	-10 +60 °C

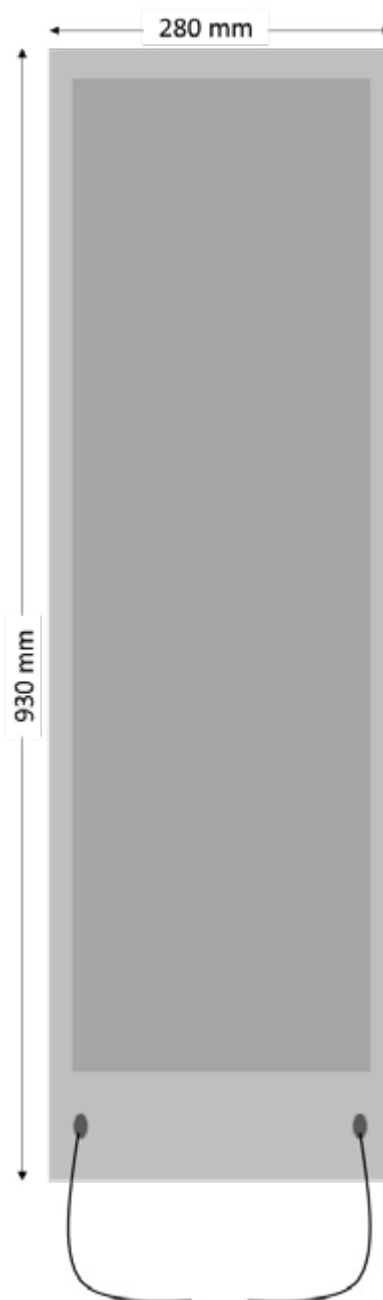

CONTACT US

Phone : +30 2310804876
+30 2310804877

Email : info@oe-technologies.com

Website : <https://oe-technologies.com/>

OUR LOCATION

Antoni Tritsi 21B, 57001 Thermi, Greece